

SHARP

Be Original.

Modular Video Wall Processor with APP control

VX Series



VX Series is a high-performance video wall processing workstation with hardware-based architecture. It caters to fields such as education, research, government broadcasting, information publishing, exhibitions, and command & control center, security monitoring, etc. VX-Series processor adopts highly advanced image processing technologies such as high-definition video signal collecting, real-time and high-resolution digital image processing.

Its Crosspoint switch technology along with high-speed FPGA architecture ensures the real-time processing of all input signals and the consistency of the data. This further helps to avoid image delay, discretization, frame loss, which guarantee real-time and high-quality video display.

Key Features


- ▶ Hardware-based architecture with modular chassis
- ▶ Supports multi windows
- ▶ Supports PIP, cross-screen, and Cropping.
- ▶ Supports variety of I/O interfaces
- ▶ Supports built-in app control
- ▶ Supports built-in multi user access
- ▶ Supports built-in different user rights
- ▶ Supports scrolling text & HD background image with optional function card
- ▶ Supports redundant power supply with optional redundant power supply

Advanced image process




Picture In Picture / Picture On Picture

Image crop function

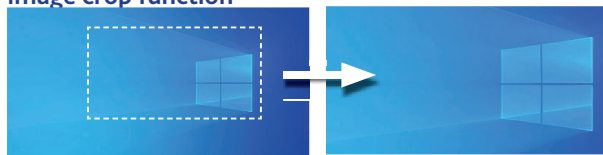





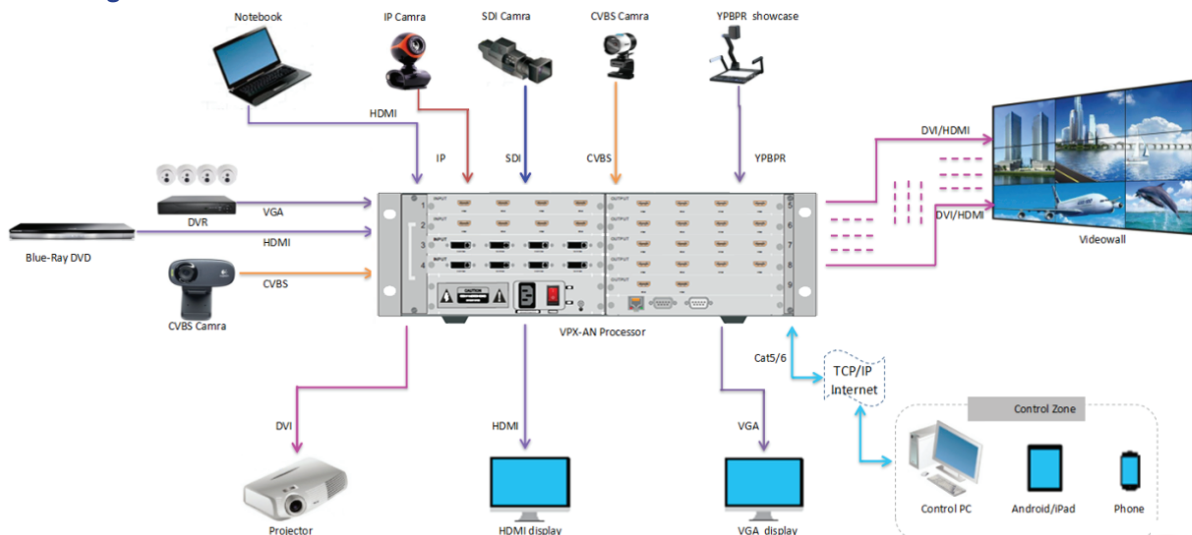





Connection Diagram










Specifications

Input cards

4-port DVI-I input card (24+5 DVI-I)  DVI1.0, HDCP1.3, HDMI1.3, Signal Crop and OSD,1920x1200@60Hz	4-port HDMI input card (HDMI Type A)  HDMI 1.3, HDCP 1.3 Signal Crop and OSD,1920x1200@60Hz	4-port VGA input card(D-Sub 15-PIN)  RGBHV, RGBS, RGsB, RsGsBs Signal Crop and OSD,1920x1200@60Hz
4-port CVBS input card(BNC)  Compatible with NTSC3.58, NTSC4.42, PAL, SECAM Signal Crop and OSD, 480i,576i resolution	4-port YPBP input(RCA X3)  Supports EIA-770.2a protocol Signal Crop, OSD 480i, 576i,480p, 576p, 720p,1080i,1080p	2 DVI+2VGA input card  Supports DVI and VGA protocol Signal crop and OSD, 1920x1200@60Hz resolution
2 HDMI + 2 VGA input card (24+5 DVI-I and D-Sub 15)  Supports HDMI and VGA protocol Signal crop and OSD, 1920x1200@60Hz resolution	4-port SDI input card with 4 SDI loop out (BNC)  Supports SMPTE424M,SMPTE292M,SMPTE259M Supports SD-SDI, HD-SDI, 3G-SDI, 1080p resolution	2-port IP input card(RJ45)  Supports H.264, H.265, MPEG-4 format 1-port with one 4K, four 1080P, nine 720P, Sixteen D1
1-port 4K HDMI/DP input card (Type A)  Supports HDMI1.4 / DP1.2 Supports maximum resolution 3840 x 2160@30hz		

Output cards

4-port HDMI LCD output card  4-port HDMI LCD output card (Type A) Supports HDMI1.3, HDCP1.3 and compatible with DVI1.0	4-port DVI LCD output card  4-port DVI LCD output card (DVI-I) Supports DVI1.0, HDCP1.3 and compatible with HDMI1.3	4-port VGA LCD output card  4-port VGA LCD output card(D-sub) Supports RGBHV, RGBS, RGsB, RsGsBs
4-port HDMI LED output card  4-port HDMI LED output card(Type A) Supports HDMI1.3, HDCP1.3 and compatible with DVI1.0	4-port DVI LED output card  4-port DVI LED output card(DVI-I) Supports DVI1.0, HDCP1.3 and compatible with HDMI1.3	1-port RJ45 preview card  1-port RJ45 preview card Support to plug multiple preview cards
1-port RJ45 + 2-port RS232  1-port RJ45 port Supports scrolling text and background image function		

Chassis Size	Input slots number	Output slots number	Control	Dimension(cm)	Weight (kg)	Power Supply	Working Humidity	Temperature	Storage
VX1 (4U)	8(up to 32)	5(up to 18)	RS232, LAN (UDP)	41 x 31 x 17.8	15	100VAC-240VAC 50/60Hz	10%-90%	-10°C - 50°C	-20°C - 75°C
VX2 (6.5U)	9(up to 36)	9(up to 36)		41 x 31 x 28.9	18				
VX3 (11U)	23(up to 92)	18(up to 72)		41 x 31 x 48.9	35				